

## Sussex Water Source of Supply

Sussex draws its potable (drinkable) water from an underground, unconfined aquifer supplied by two deep wells located within the municipality. The pumping stations are capable of a maximum combined flow rate of 5.7 cubic meters/minute (1,250 Imperial gallons/minute) into the distribution system. Reservoirs with a combined capacity of 5,428,000 litres provide backup supply.

The Town of Sussex chlorinates its potable water at the well heads by means of constant automated chlorination to maintain a safe residual level at all times. The rate of chlorine integration is approximately 0.8mg/L (ppm).

### Related Links

For those who wish to explore water and wastewater issues, the following Internet addresses may be helpful:

American Water Works Association  
[www.awwa.org](http://www.awwa.org)

Environment Canada  
<https://www.ec.gc.ca/eau-water/>

Water Environment Federation  
[www.wef.org](http://www.wef.org)

GNB Water Classification Regulation  
[www.gnb.ca](http://www.gnb.ca)

Water Use It Wisely (For Kids)  
<https://wateruseitwisely.com/>

## Did you know?

**Did you know that rain barrels can help save over 1000 gallons of water? That's equivalent to almost 13 bath tubs full of water!**

**There are plenty of reasons WHY installing a Rain Barrel is a good and green idea.**

- Since you can save nearly 1,000 gallons of water, this can help you save money on your water bill by reusing this water in a strategic way to water plants both inside and outside. You can also use it to wash your car or your pets!
- Sometimes plants aren't big fans of tap water, for many reasons, but using rain water can help provide the plants with more natural sources of water that is better to help maintain their growth.
- Installing a rain barrel can help prevent ponding and flooding in your yard. This can help control moisture levels around your house foundation to reduce the risk of flooding.


## Tips to conserve water at home

- Thaw frozen food in the refrigerator and not under the tap.
- Keep a pitcher of water in the refrigerator instead of allowing the tap to run until the water is cold.

## Water Leaks

A continuous leak through a hole this small wastes **74,000 gallons** of water in just three months!

*If you hear noises in pipes in your home or property, that you suspect might be caused by water leakage, give us a call! We will be happy to help determine the cause and remedy.*

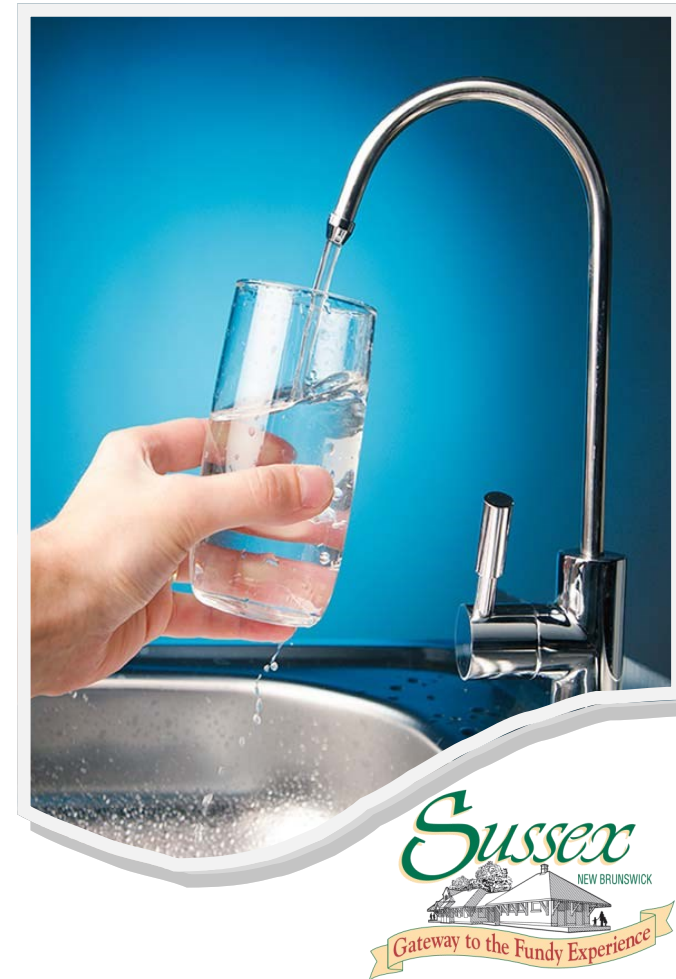

## 2020 Annual Water Quality Testing Results

524 Main Street  
Sussex, NB  
E4E 3E4

(506) 432-4540  
[www.sussex.ca](http://www.sussex.ca)

# WATER QUALITY INORGANIC (CHEMICAL) TESTING RESULTS 2020

Chemical Parameters		Canadian Drinking Water Quality Guideline	Average of Results	Range of Detection
<b>Inorganic Parameters</b> -naturally occurring or synthetic substances containing carbon, hydrogen, nitrogen, and oxygen.				
<b>Alkalinity</b> -capacity of water to neutralize acids	mg/L	-	110.3	108-113
<b>Aluminum</b> -inorganic element	ug/L	100	<5	<5
<b>Antimony</b> -element used in metal manufacturing	mg/L	6	<2	<2
<b>Arsenic</b> -can be naturally occurring or from industrial effluents	ug/L	10	<1	<1
<b>Barium</b> -found in naturally occurring compounds and industrial processes	ug/L	1000	84	68-92
<b>Boron</b> -naturally occurring in over 80 minerals and within the earth's crust	mg/L	5	<0.1	<0.1
<b>Cadmium</b> -present as an impurity in galvanized pipe, also present in solder	ug/L	5	<0.02	<0.02
<b>Calcium</b> -related to hardness	mg/L	-	42.10	39.1-47.1
<b>Chloride</b> -natural element, found in salt used for ice control and in chemical industry effluents	mg/L	250	15.9	15.2-16.7
<b>Chromium</b> -naturally occurring metallic ion	ug/L	50	<1	<1
<b>Conductivity</b> -measure of the ability of water to carry electric current	uS/cm	-	318	318
<b>Copper</b> -can cause staining in laundry above Health Advisory Limit	ug/L	1000	2	<1- 4
<b>Fluoride</b> -naturally occurring in minerals and soils	mg/L	1.5	<0.1	<0.1
<b>Iron</b> -natural metallic ion, can cause laundry and plumbing fixture staining	ug/L	300	11	10-12
<b>Lead</b> -common element, found in older plumbing installations, also can be present in solder	ug/L	5	<1	<1
<b>Magnesium</b> -contributed to water hardness	mg/L	-	4.00	4.0
<b>Manganese</b> -natural metallic ion, can cause laundry and plumbing fixture staining	ug/L	50	<2	<2
<b>Mercury</b> -a heavy crystalline salt	ug/L	1	<0.02	<0.02
<b>Nitrate-nitrite</b> -naturally occurring ion, used in inorganic fertilizers	mg/L	-	1.1	1.1
<b>pH</b> -measure of acidity or causticity	ug/L	7.0-10.5	7.55	7.36-7.74
<b>Potassium</b> -second most abundant element in the earth's crust	mg/L	-	1.5	1.0-1.7
<b>Selenium</b> -inorganic element	ug/L	10	<2	<2
<b>Sodium</b> -most abundant element in the earth's crust, high concentrations can affect taste	mg/L	200	11.1	10.0-12.6
<b>Sulfate</b> -naturally occurring in numerous minerals.	mg/L	500	25	21-33
<b>Thallium</b> -rare natural metallic element	ug/L	-	<1	<1
<b>Total Hardness</b> -caused by dissolved natural salts	Ca/Mg	-	122	122
<b>Turbidity</b> -measurement of suspended material in the water	NTU	1	0.15	0.14-0.17
<b>Uranium</b> -found in certain rare minerals	ug/L	20	<0.5	<0.5
<b>Zinc</b> -can be found in some plumbing fixtures	ug/L	500	<2	<2
<b>TDS</b> -quality is its effect on taste	mg/L	-	151	146-161

UNITS = mg/l are parts per million and ug/l are parts per billion

## WATER SAMPLING & TESTING

### CHEMICAL ANALYSIS (INORGANIC)

Town of Sussex water comes from two municipal wells. As the water travels through the ground, it dissolves naturally occurring minerals.

In order to ensure that Sussex water is safe to drink, a number of chemical analyses are performed each year.

### INORGANIC ANALYSIS

The results from the most recent analysis are presented in this report. The Average of Results indicates the average of the **three** locations tested. The Range of Detections indicates the lowest detections to the highest in each parameter.

### ORGANIC ANALYSIS

Two Town wells and a third location are sampled for Clean Water Act parameters twice a year.

### BACTERIOLOGICAL ANALYSIS

Ten sites are sampled weekly for bacteriological parameters.

### CHLORINE ANALYSIS

Twelve sites are sampled twice weekly for chlorine content. Of these twelve sites, four sites are sampled on each working day. These include the well sites.